


Leguan 170.

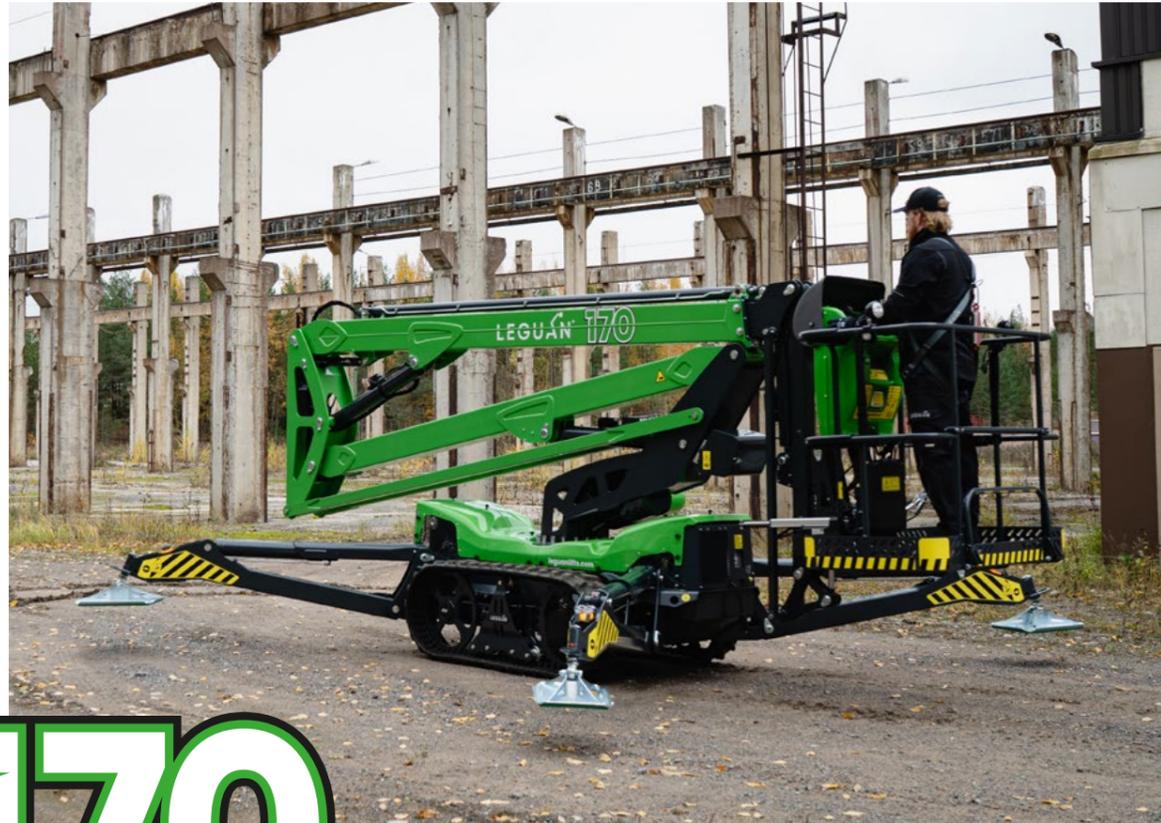

# 170

## Premium performance engineered for efficiency.

**LEGUAN 170** is the newest model completing the all-terrain spider lift range. Designed with the same proven DNA as the flagship Leguan 195, 225 and 265 models, the 170 delivers rugged Finnish engineering and true off-road capability in a compact, highly versatile package. Like all Leguan all-terrain series models, the 170 is designed to be fully driven and operated from the platform, maximizing efficiency and ease of use on demanding job sites.

Built for operators who need reliable access on demanding worksites, the Leguan 170 combines tracked chassis with high ground clearance, efficiency boosting automatic functions and intuitive controls for fast, easy operation in any environment. Its compact size and outstanding maneuverability make it ideal for various job sites.

For arborists, contractors, maintenance professionals and rental fleets, the Leguan 170 offers a cost-efficient entry into full all-terrain performance – extending the reach, efficiency and reliability that Leguan lifts are known for worldwide.




**16.8 m**  
max. working height

**8.9 m**  
max. side reach

**250 kg**  
max. lift capacity

## 170 Premium performance engineered for efficiency.

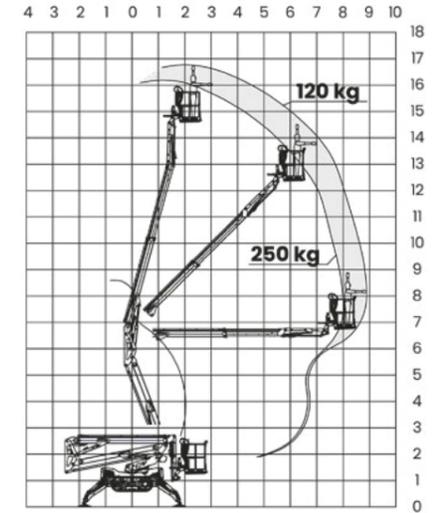

### Standard features.

- Leguan EDX
- 14 hp Kubota diesel engine
- 230 V electric motor + power outlets on platform
- USB power outlets on platform
- Automatic engine RPM control
- Automatic levelling of the outriggers
- Proportional outreach monitoring system
- Electric rotation of the platform
- Home / back to work function
- JIB-boom with 120-degree operating range
- Battery powered emergency lowering system
- Lower controls with integrated service display
- Intuitive joystick control
- Elevated driving position (EDP)

### Optional feature.

- Remote control for driving and outriggers
- LED spotlights for platform
- Tool trays on platform
- Outrigger beacons
- Hose to platform (air/water)
- Engine heater
- Non-marking tracks
- Narrow single person platform
- Custom colour

### Technical features.

<b>Max. lift capacity</b>	250 kg (2 persons)
<b>Max. working height</b>	16.8 m
<b>Max. platform height</b>	14.7 m
<b>Max. side reach</b>	8.0 m (250 kg) – 8.9 m (120 kg)
<b>Transport dimensions, L x W x H</b>	5.35 x 1.33 x 2.15 m
<b>Platform dimensions</b>	1.33 x 0.75 m
<b>Rotation of the platform</b>	110° (±55°)
<b>Slewing</b>	440°
<b>Gradeability</b>	45% (25°)
<b>Dimensions w/o platform, L x W</b>	4.63 x 1.25 m
<b>Minimum outrigger support dimensions</b>	4.08 x 4.08 m
<b>Required space for outrigger operation</b>	4.38 x 4.27 m
<b>Max. slope for outriggers</b>	25% (14°)
<b>Weight</b>	2,530 kg
<b>Engine</b>	Kubota 14 hp diesel or 230 V / 2.2 kW electric
<b>Drive system: hydraulic</b>	tracks
<b>Max. drive speed</b>	2.9 km/h